


ISO 9906: 2012-Grade 3B

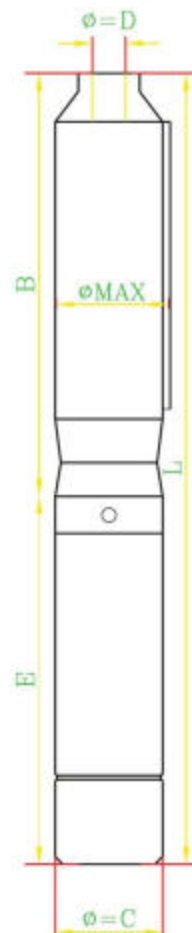

| capacity(m ³ /h) (بدهی مترمکعب در ساعت) | | | | | | | | | | Pump + Motor |
|--|----|-----|-----|-----|-----|-----|-----|-----|-----|------------------------|
| | 3 | 2.7 | 2.4 | 2.1 | 1.8 | 1.5 | 1.2 | 0.9 | 0.0 | |
| Head(m) (رتفاع متر) | | | | | | | | | | |
| | 16 | 19 | 23 | 25 | 27 | 29 | 31 | 32 | 34 | URD 102/05 + 4E0.371/2 |
| | 22 | 26 | 29 | 33 | 36 | 39 | 42 | 43 | 46 | URD 102/07 + 4E0.371/2 |
| | 28 | 36 | 43 | 49 | 54 | 58 | 61 | 64 | 67 | URD 102/10 + 4E0.551/2 |
| | 42 | 52 | 60 | 67 | 74 | 79 | 83 | 86 | 92 | URD 102/14 + 4E0.751/2 |
| | 60 | 75 | 90 | 101 | 111 | 120 | 127 | 131 | 139 | URD 102/20 + 4E1.11/2 |
| | 86 | 103 | 124 | 135 | 146 | 157 | 168 | 173 | 184 | URD 102/27 + 4E1.5 1/2 |

| WEIGHT(kg) | | | DIMENSIONS | | | | | | In | MOTOR | | Pump + Motor |
|------------|------|-------|------------|------|-----|-----|-----|------|------|-------|------|------------------------|
| TOTAL | PUMP | MOTOR | ØMAX | Ø=D | Ø=C | B | E | L | A | HP | kW | |
| 9.8 | 2.5 | 7.3 | 100 | 1 ¼" | 98 | 236 | 346 | 582 | 3.4 | 0.5 | 0.37 | URD 102/05 + 4E0.371/2 |
| 10.1 | 2.8 | 7.3 | 100 | 1 ¼" | 98 | 271 | 346 | 617 | 3.4 | 0.5 | 0.37 | URD 102/07 + 4E0.371/2 |
| 11.5 | 3.3 | 8.2 | 100 | 1 ¼" | 98 | 324 | 365 | 689 | 4.3 | 0.75 | 0.55 | URD 102/10 + 4E0.551/2 |
| 12.7 | 3.9 | 8.8 | 100 | 1 ¼" | 98 | 394 | 380 | 774 | 6 | 1 | 0.75 | URD 102/14 + 4E0.751/2 |
| 14.9 | 4.9 | 10 | 100 | 1 ¼" | 98 | 499 | 405 | 904 | 8.3 | 1.5 | 1.1 | URD 102/20 + 4E1.1 1/2 |
| 18.4 | 6.6 | 11.8 | 100 | 1 ¼" | 98 | 622 | 439 | 1061 | 10.2 | 2 | 1.5 | URD 102/27 + 4E1.5 1/2 |