


ISO 9906: 2012-Grade 3B

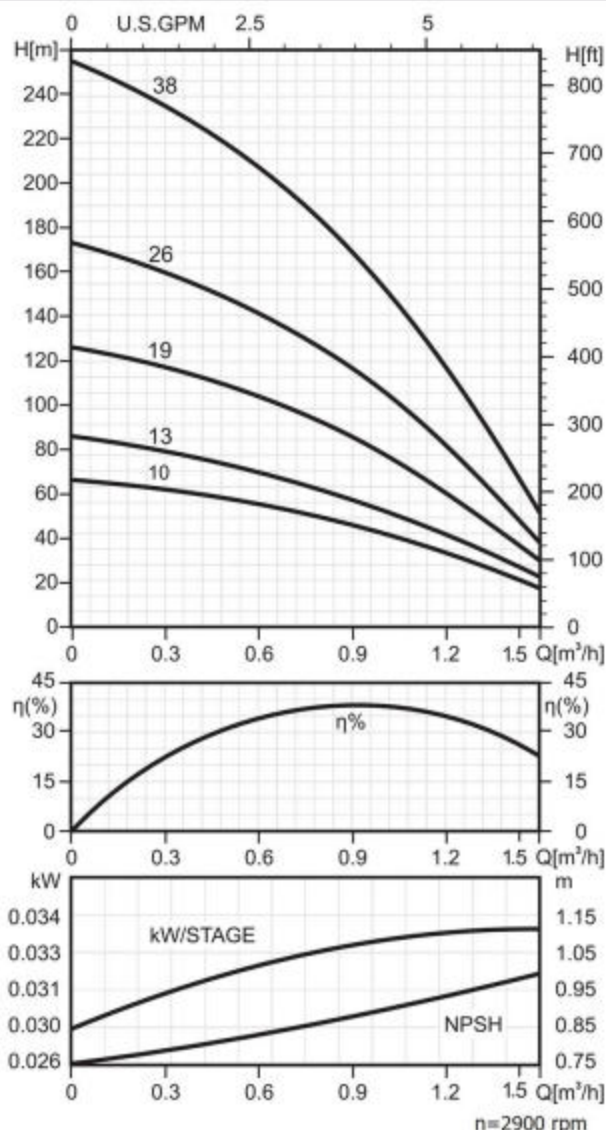

capacity(m ³ /h) (ابهی مترمکعب در ساعت)										Pump + Motor
	1.8	1.5	1.2	0.9	0.6	0.3	0.0	Head(m) (ارتفاع متر)		
	1	17	32	46	55	63	66	URD 101/10 + 4E0.371/2		
	2	23	41	57	70	78	86	URD 101/13 + 4E0.371/2		
	5	30	60	86	105	118	126	URD 101/19 + 4E0.551/2		
	7	39	81	117	141	160	173	URD 101/26 + 4E0.751/2		
	10	52	117	169	208	234	253	URD 101/38 + 4E1.11/2		

WEIGHT(kg)			DIMENSIONS						MOTOR			Pump + Motor
TOTAL	PUMP	MOTOR	ØMAX	Ø=D	Ø=C	B	E	L	In A	HP	kW	
10.6	3.3	7.3	100	1 ¼"	98	324	349	670	3.4	0.5	0.37	URD 101/10 + 4E0.371/2
11.0	3.7	7.3	100	1 ¼"	98	377	346	723	3.4	0.5	0.37	URD 101/13 + 4E0.371/2
12.9	4.7	8.2	100	1 ¼"	98	481	365	846	4.3	0.75	0.55	URD 101/19 + 4E0.551/2
14.6	5.8	8.8	100	1 ¼"	98	642	380	1022	6	1	0.75	URD 101/26 + 4E0.751/2
19.2	9.2	10	100	1 ¼"	98	902	405	1307	8.3	1.5	1.1	URD 101/38 + 4E1.11/2